
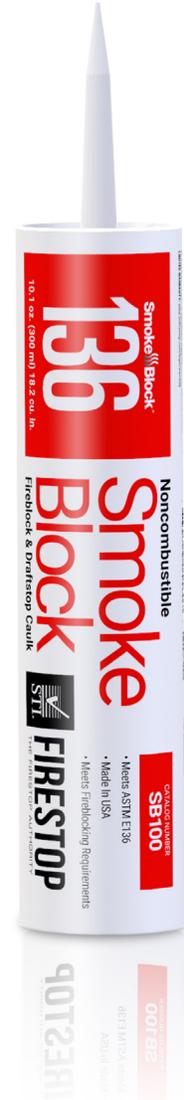


# SmokeBlock® Caulk

SmokeBlock® Caulk is a non-combustible sealer that is used to fill the annular space around penetrants and along seams to openings throughout the entire building envelope. When installed properly, SmokeBlock® will provide fireblocking as well as smoke and draft stopping in wood frame walls and floors.

## Applications

SmokeBlock® is intended for use in wood frame walls and floors. Some local codes require the use of **non-combustible** fireblocking materials in openings around vents, pipes, chimneys, fireplaces, and general building seams to openings. SmokeBlock® can be used in construction such as one or two family dwellings. Any general building openings, as well as horizontal and vertical penetrations of the living unit envelope (indicated in blue below) must be sealed.

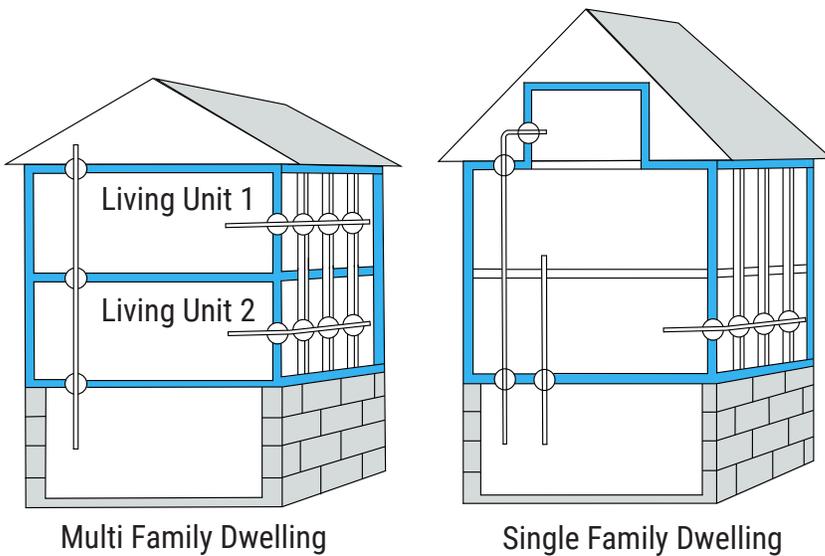

## Specifications

All data, video, and communications cable bundles shall utilize an enclosed smoke and acoustical pathway device wherever said cables penetrate non-fire-rated walls and floors. The smoke and acoustical pathway shall contain a built-in sealing system and shall automatically adjust to the installed cable loading and shall permit cables to be installed, removed, or retrofitted without the need to remove or reinstall acoustical materials. The pathway shall provide an achievable STC rating of greater than or equal to the STC rating of the specific underlying construction per ASTM E90-04/ASTM C919.

## Limitations

**Not for use as a firestop sealant.**



Wires, Cables, Lines



Flue Pipes



HVAC, Ducts



Pipes

## Features & Benefits

- Quality Non-Sag Caulk
- Water-Based for Easy Clean-up
- Light Red for Easy Identification
- Consistent Quality-No Shaking or Mixing Required
- Adheres to Wood and Masonry Building Materials
- Meets ASTM E136
- Noncombustible
- Does not support flame or smoke
- Does not shrink, warp, or melt for test duration

# SmokeBlock® Caulk

SmokeBlock

136

## PHYSICAL PROPERTIES

Color	Light Red
Odor	Odorless
Specific Gravity	1.5-2.0
pH	10.5-11.5
Storage & Application Temperatures	35°F (1.7°C) - 95°F (35°C)
Physical State	Paste
Evaporation Rate	>1.0 (BuAc=1)
VOC Content	SCAQMD (U.S. EPA Method 24): <2 gm/L
Shelf Life	12 Months

## ORDERING INFORMATION

UPC#	Catalog Number	Description	Qty.	Case Qty.	Weight (Each)
730573					
01160	SB100	SmokeBlock® Caulk	1 Tube	12 Tubes	10.1 Oz. Tube

IMPORTANT NOTICE: ALL STATEMENTS, TECHNICAL INFORMATION, AND RECOMMENDATIONS CONTAINED HEREIN ARE BASED UPON TESTING BELIEVED TO BE RELIABLE, BUT THE ACCURACY AND COMPLETENESS THEREOF IS NOT GUARANTEED.

STI TYPICALLY WARRANTS ITS PRODUCTS FOR ONE FULL YEAR. FOR COMPLETE DETAILS OF OUR STANDARD WARRANTY, PLEASE VISIT [WWW.STIFIRESTOP.COM/LEGAL/WARRANTY](http://WWW.STIFIRESTOP.COM/LEGAL/WARRANTY)  
MADE IN THE USA - © 2018 SPECIFIED TECHNOLOGIES INC.

